

Manual Wave Single

Table of Contents

ln	troduction	3	
Ab	out this document	3	
Ot	Other relevant documents		
Sy	Symbols used in this manual		
W	arranty and liability	3	
Wa	arranty	3	
Lia	bility	3	
Pr	oduct information	4	
Int	ended use	4	
Sp	ecifications	4	
So	lar panel flange dimensions	4	
Re	quirements for the work environment	5	
Sy	stem and application	6	
1.	Components	6	
Sa	fety	7	
1.	Personal protective equipment	7	
2.	Safety warnings and regulations	7	
In	stallation	8	
1.	Preparation	8	
2.	Place the units	10	
3.	Connect units with stabilizers	13	
4.	Place permanent ballast	15	
5.	Lightning protection	22	
6.	Mounting the first solar panel	23	
7.	Mounting the following solar panels	25	
8.	Placing Rear Deflectors	27	
Aı	nnexes	30	
A.	Cable management	30	
B.	Grounding, equipotential bonding and lightning protection	31	
C.	Lightning protection	32	
D.	Removal and recycling	36	

Introduction

About this document

This manual covers the installation instructions for the CPX Wave mounting system for solar panels on flat roofs with roofing materials made of concrete, bitumen, EPDM, PVC and TPO. For other roof materials, please contact your supplier.

The mounting system is suitable for mounting solar panels in a single landscape orientation.

These instructions are addressed at qualified technical personnel.

You can download the latest version of this manual from www.cpx.eu.

Other relevant documents

When installing the CPX Wave mounting system, you will need the following documents in addition to this manual:

- · The project plan, which you can create in the calculator at https://calculator.cpx.eu.
- · The installation manuals for the solar panels, inverters and any other components.

During the installation of the mounting system, it is important to adhere to the installation manual and the accompanying standards to prevent accidents. Pay special attention to (local) standards, regulations and legislation (among others):

- · Local Building Regulations (latest version)
- Health and Safety at Work etc Act 1974
- · Health and Safety in Roof work HSE
- Eurocodes 0 (EN 1990 Structural Design)
- Eurocodes 1 (EN 1991 (Influences on structures)
- HD-IEC 60364 series Electrical installations for low voltage
- EN-IEC 62305-2 Protection lightning Risk Management
- MIS 3002 The solar PV standard
- MCS012 Product Certification Scheme Requirements: Pitched Roof Installation Kits

Symbols used in this manual

Δ	Warning!	Failure to follow this instruction could result in serious injury or major damage to the product.
!	Caution!	Failure to follow this instruction could result in personal injury or damage to the product.
1	Note	Emphasises an instruction.

Warranty and liability

Warranty

CPX extends a 20 year product warranty. The warranty is subject to the warranty terms and general terms & conditions of CPX. These can be found on the website www.cpx.eu.

Liability

CPX accepts no liability for damage or injury caused by the failure to comply (strictly) with the safety guidelines and instructions in this manual, or by negligence during installation of the product and the accessories listed in this document.

CPX reserves the right to change this document without notice.

Product information


Intended use

The CPX Wave Single mounting system is intended for mounting solar panels on flat roofs. With this mounting system you can install solar panels with the long side at the bottom (landscape). The mounting system is intended to be installed in a single arrangement.

Specifications

Orientation of solar panels	Landscape	
Frame height of solar panel	29 - 50 mm	
Maximum dimensions of solar panels	Length: 1550 mm - 2500 mm Width: 1070 mm - 1150 mm	
Maximum field size	40 × 40 m per segment	
Roof material	Concrete Bitumen EPDM PVC TPO	
Roof pitch	0 - 5° If your roof slope is > 5°, please contact your supplier.	
Maximum roof height	Subject to Eurocode guidelines and national additions. Use the calculator to calculate the possibilities of your project.	
Edge zone	Calculate the edge zone with the calculator. The distance of the solar panels to the edge of the roof should be approximately 1/5 of the height of the building with a minimum distance of 30 cm, due to highly turbulent wind currents in this zone. No solar panels may be installed in this zone, whether entirely or in part.	

Solar panel flange dimensions

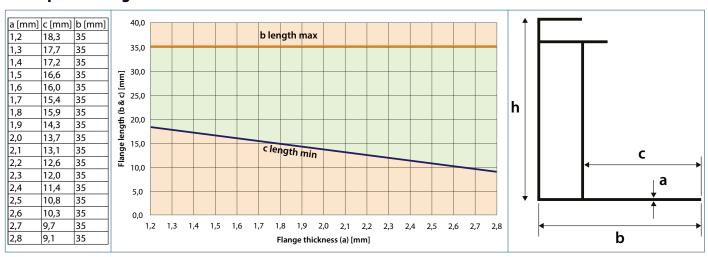


- ! Enter the data in the calculator, so you are sure of choosing the right system for the terrain category, snow loads and wind zone that applies to your project.
- f your project has different specifications than these, please contact CPX.

Requirements for the work environment

The roof is in good condition.
The roof construction has sufficient bearing capacity to support the installation, taking into account wind and snow loads.

System and application

1. Components

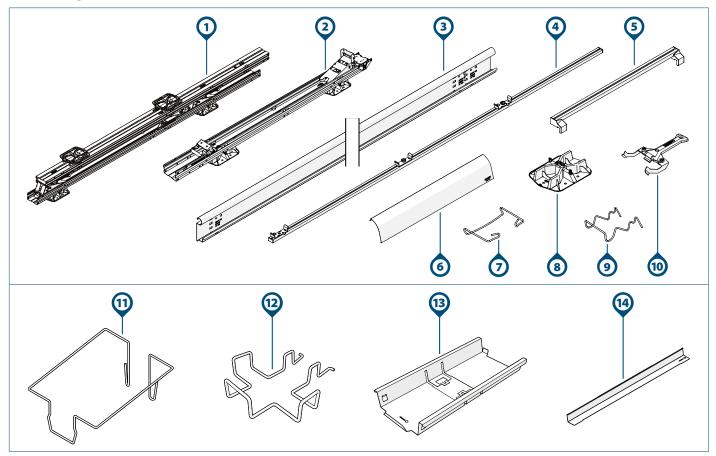

Component		Article number	Component	Article number
1)	Wave Single Unit 3P SR2	1009160	7) Wave Single Rear Deflector Clip	1009170
2)	Wave Single Unit 1P SR2	1009161	8) Wave Base Plate	1009120
3)	a. Wave Stabilizer 2900	1009110	9) Wave Cable Bracket - Stabilizer	1009124
	b. Wave Stabilizer 3530	1009111	10) Wave Module Unlock Tool	1009142
	c. Wave Stabilizer 4000	1009114	11) Wave Ballast Bracket	1009123
	d. Wave Stabilizer 4350	1009115	12) Wave Ballast Bracket Perimeter	1009126
4)	Wave Measuring Bar 2500mm	1009143	13) Wave Ballast Tray	1009129
5)	Wave Spacer Tool	1009144	14) Wave Ballast Tray Extender	1009130
6)	a. Wave Single Rear Deflector 1525	1009171		
	b. Wave Single Rear Deflector 1700	1009172		
	c. Wave Single Rear Deflector 1875	1009173		
	d. Wave Single Rear Deflector 2075	1009174		
	e. Wave Single Rear Deflector 2225	1009175		

1 Check that the correct components are present in the required numbers according to the project plan generated by the calculator.

For situations where a PV system needs to be connected to the lightning collection system, see Chapter 5. and Appendix Lightning protection for more information.

Safety

1. Personal protective equipment



2. Safety warnings and regulations

Warning!

- Installation work should always be carried out by at least two skilled people.
- ⚠ Do not use components from other mounting systems.
- ⚠ Do not leave out parts.
- Always work according to the current regulations for working on roofs.
- Do not perform the installation in strong winds, or when the roof is slippery or wet.
- Always work on the roof with fall protection and, if necessary, with safety nets and edge protection.
- Never stand on or in the gutter.
- Always use a lifting aid or hoisting device when moving heavy equipment.
- Always place ladders on a strong, stable surface.

Caution!

- ! Walk as little as possible on the roof. Use an aerial platform, ladder or other solution.
- ! Never walk on the system or on the solar panels.
- CPX is in no way responsible for the installation and/or connection of lightning protection on the roof. Get expert advice from your specialist and ensure that a safe installation can be guaranteed according to EN-IEC 62305 and HD-IEC 60364.


Installation


1. Preparation

1 1	1 Inspect the roof.			
	The roof is in good condition.			
	The roof construction has sufficient bearing capacity to support the installation, taking into account wind and snow loads.			
2 (2 Check the project plan and components.			
	Check the project plan. Is there no project plan? Then create one in the online calculator before starting installation.			
	Check that all components are present (page 5).			


3 Make sure all the re	3 Make sure all the required tools are at hand.			
Chalkline tool	Marker or chalk	Broom	Tape measure	Pliers


4 Measure the length of the solar panels and check the corresponding length of the rear deflector.		
1550 - 1765 mm	Wave Single Rear Deflector 1525	
1765 - 1920 mm	Wave Single Rear Deflector 1700	
1920 - 2105 mm Wave Single Rear Deflector 1875		
2105 - 2300 mm Wave Single Rear Deflector 2075		
2300 - 2500 mm	Wave Single Rear Deflector 2225	

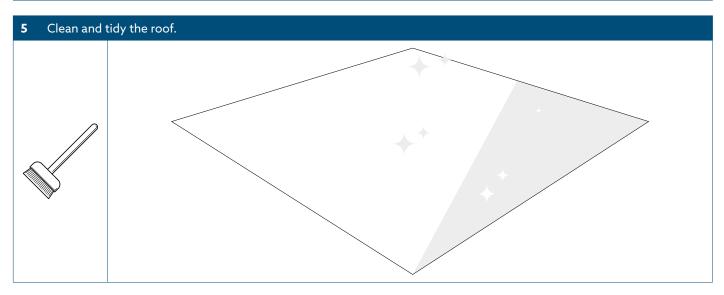






1 Take the starting point of the installation from the project plan.

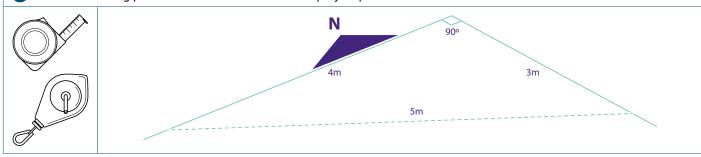

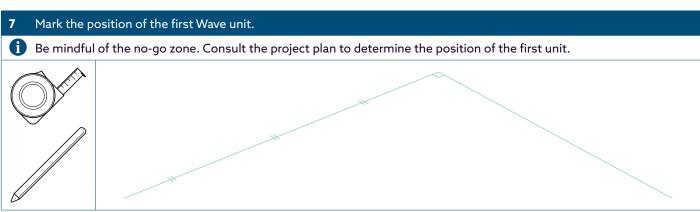


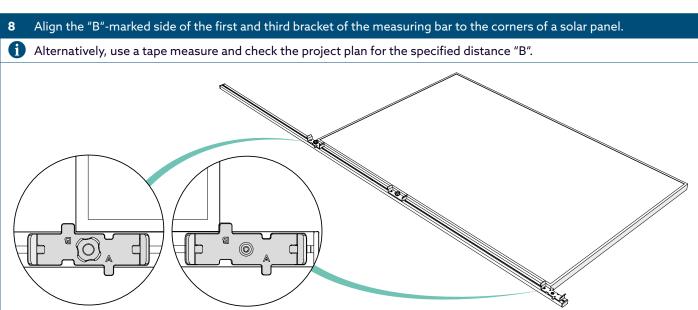


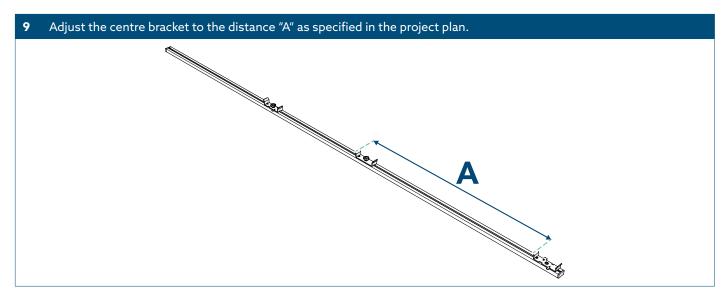


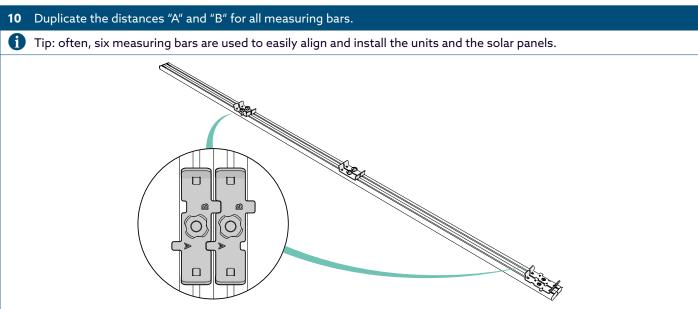


2. Place the units

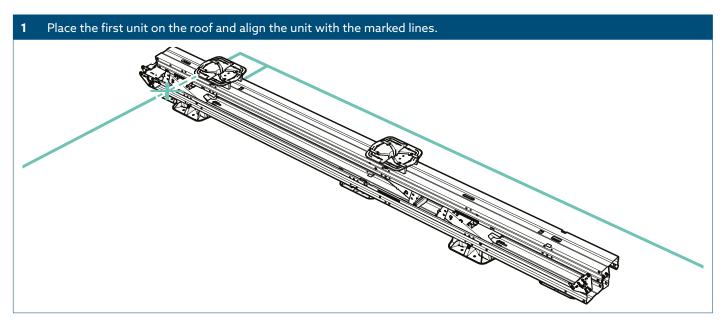

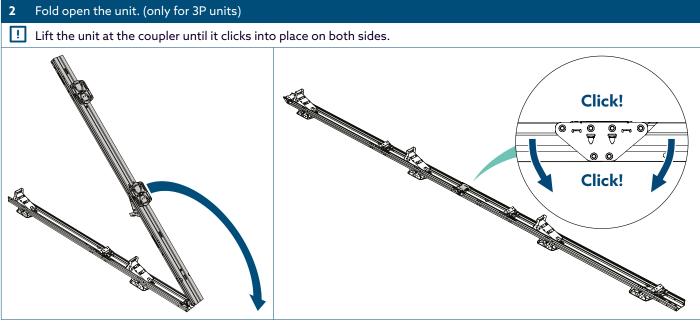


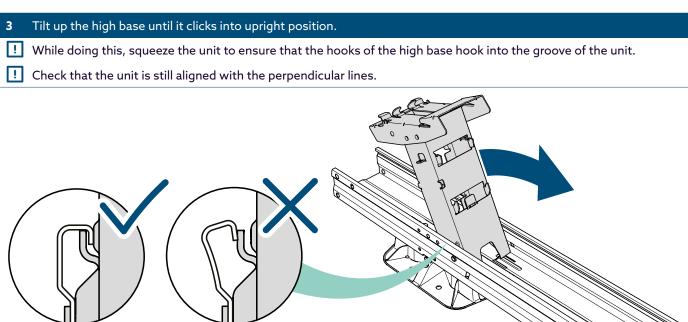

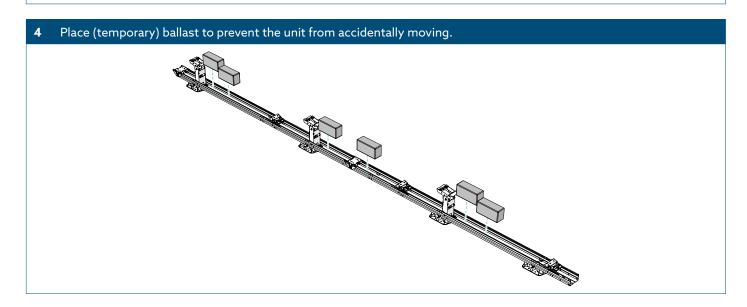

Place the next two units on the roof.


I For installation on a location with high snow loads: Consult the project plan to determine if an additional third unit needs to be placed in the center of each solar panel. This helps prevent damage caused by excessive snow load.

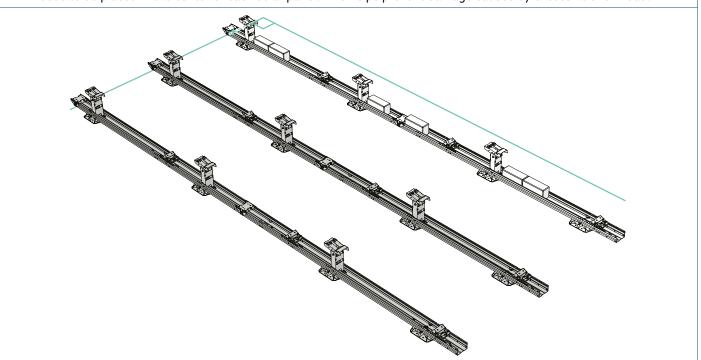


Repeat step 2.3. Tilt up the high base until it clicks into upright position.

Use measuring bars to determine the distance between the units

! Ensure correct orientation of the measuring bars.

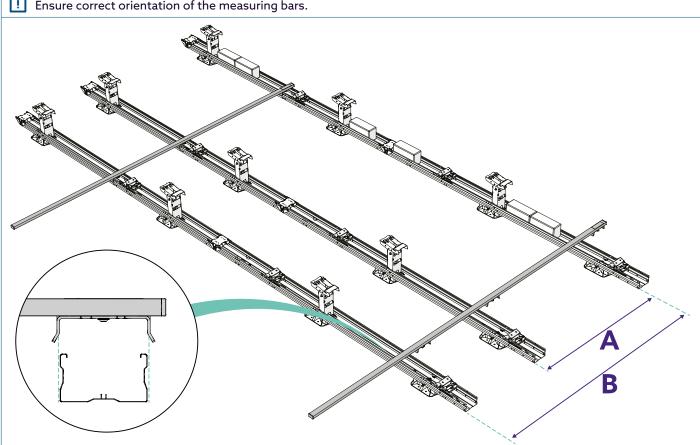


Repeat step 2.4. Place (temporary) ballast to prevent the unit from accidentally moving.
Repeat step 2.5. Place the next two units on the roof.
Repeat step 2.6. Use measuring bars to determine the distance between the units
Repeat step 2.3. Tilt up the high base until it clicks into upright position.

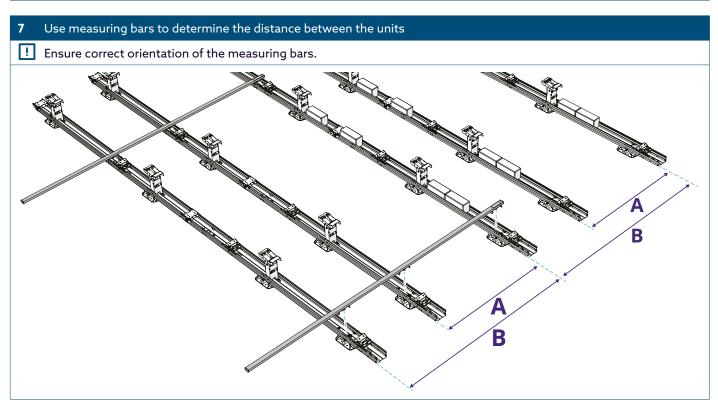



Repeat step 2.4. Place (temporary) ballast to prevent the unit from accidentally moving.


3. Connect units with stabilizers


13

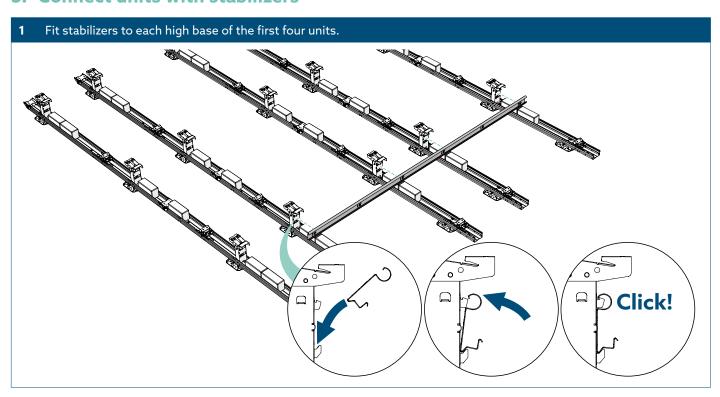

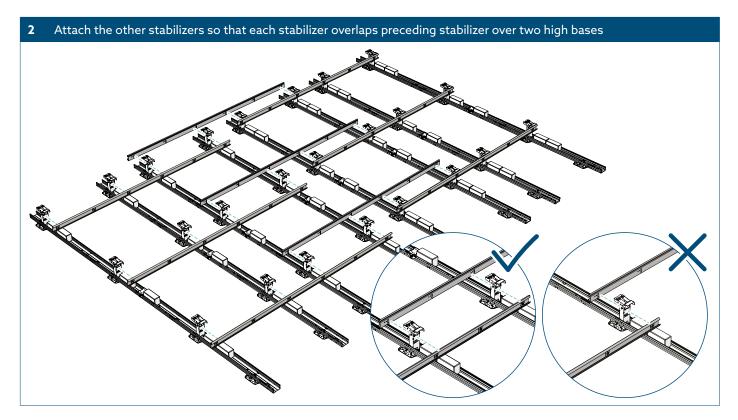

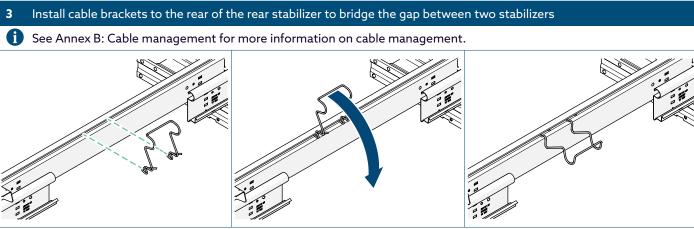

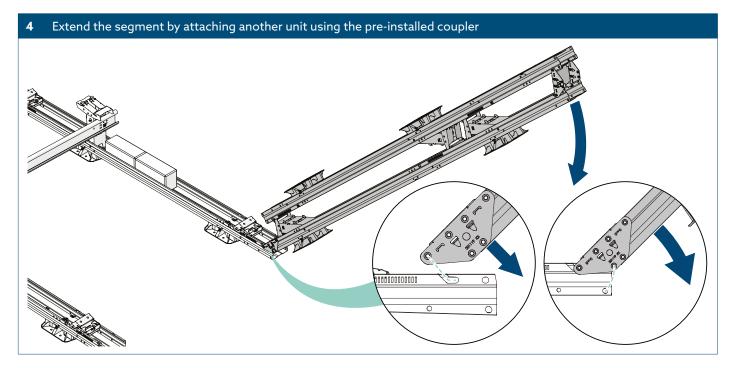

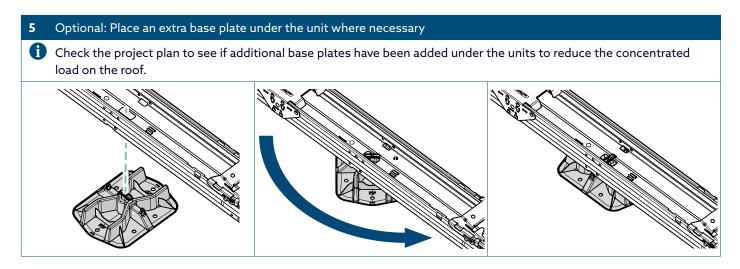


4. Place permanent ballast


The calculator determines the ballast needed for your project. Follow the instructions from the project plan determined by the calculator.

In this chapter we provide a general description of the five possible positions for the ballast.

If anything changes in the layout of the solar panel field, the ballasting has to be recalculated.

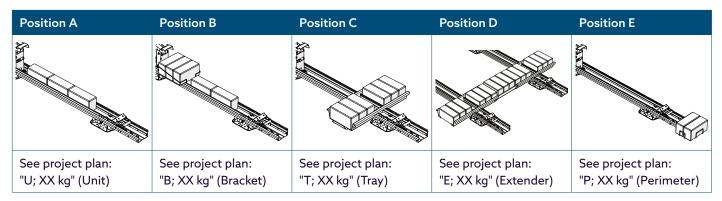


Position A In the units

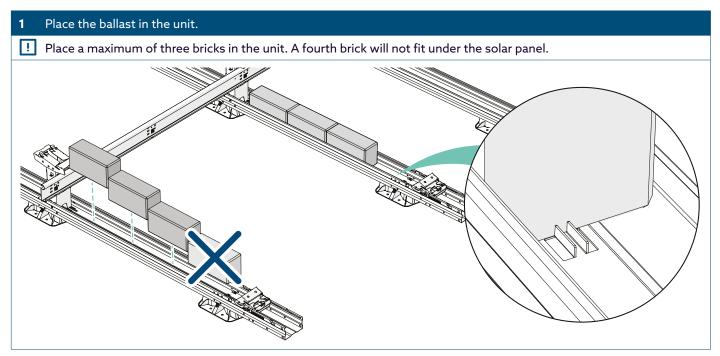


Position B In ballast brackets


- 1 Squeeze the hooks of the ballast bracket together and place the bracket next to the high base in the unit.
- 1 Do not position the ballast bracket on the locking tab of the high base. This can unlock the high base compromising the structural strength.

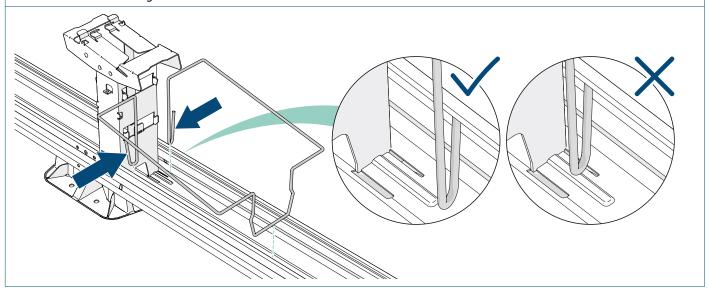


- **2** Fill the ballast bracket and, if necessary, the unit with bricks.
- Place a maximum of two bricks in the unit in combination with the ballast bracket. A third brick will not fit under the solar panel.

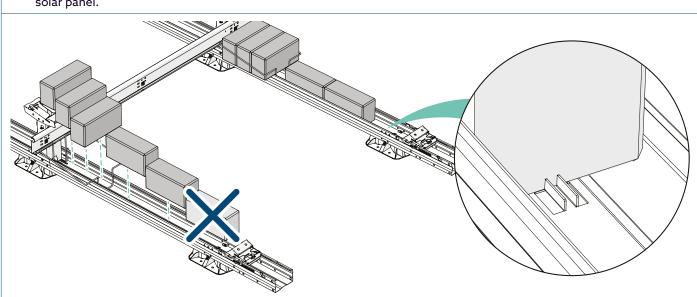


Position C In ballast trays

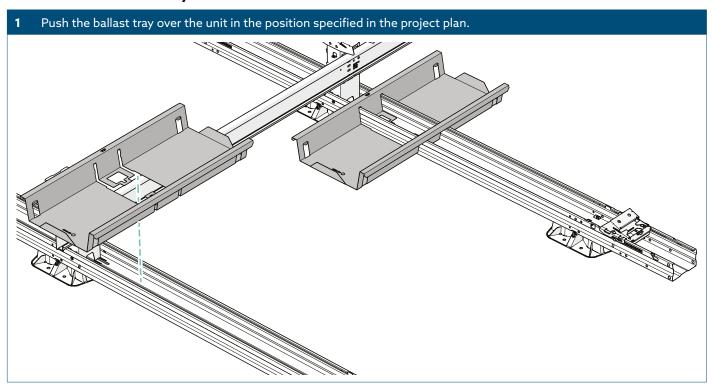


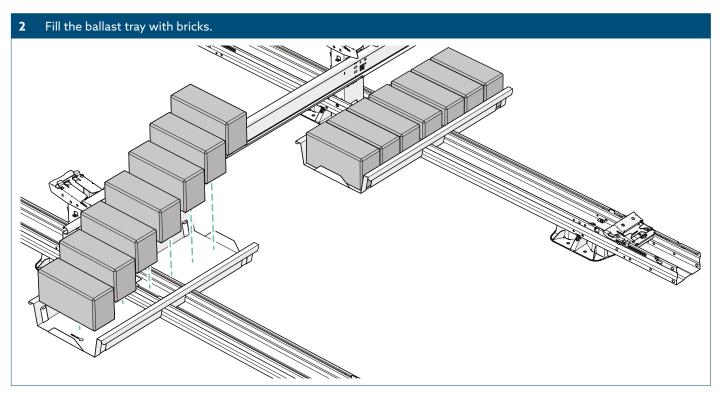



- If the project plan specifies more than one ballast tray, slide the outer ballast tray against the tabs in the unit. In this array you can place a maximum of three ballast trays in a row.
- Place the bricks in the outer ballast tray on the flat side, otherwise they will not fit under the solar panel.
- follow the project plan for the required positions and quantities of ballast.

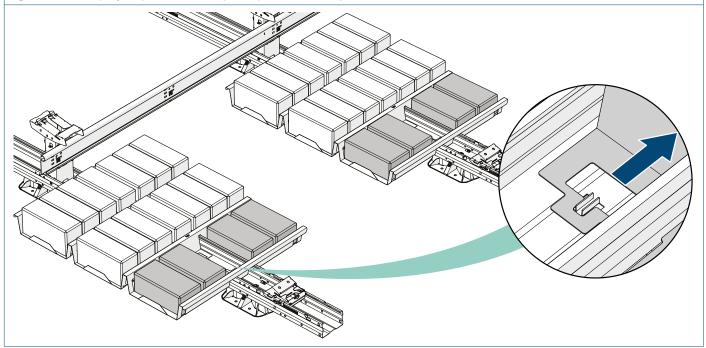


Position D In ballast trays with ballast tray extenders

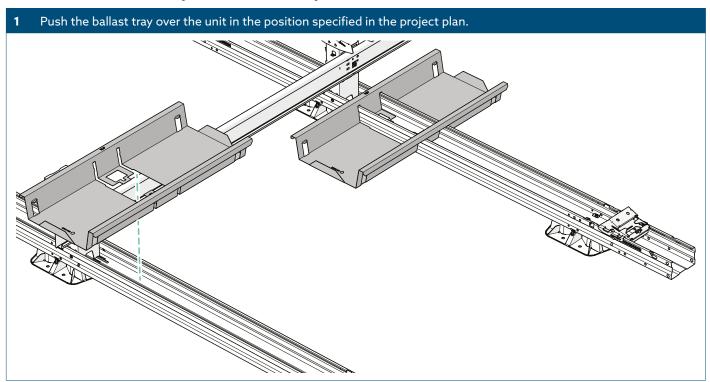


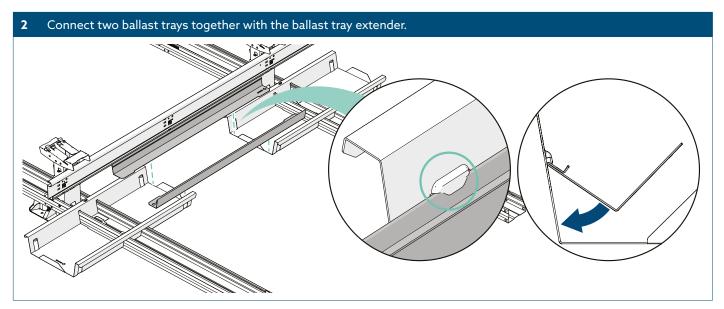

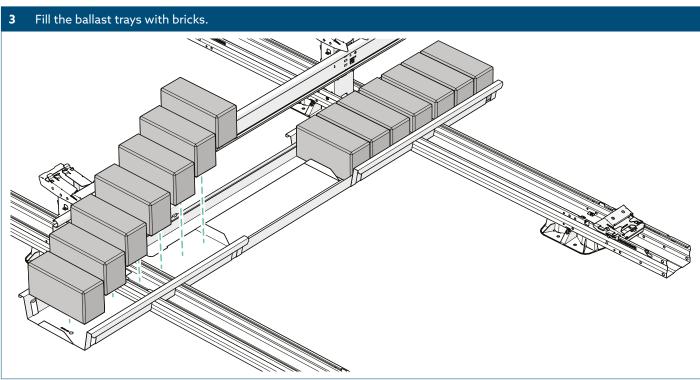


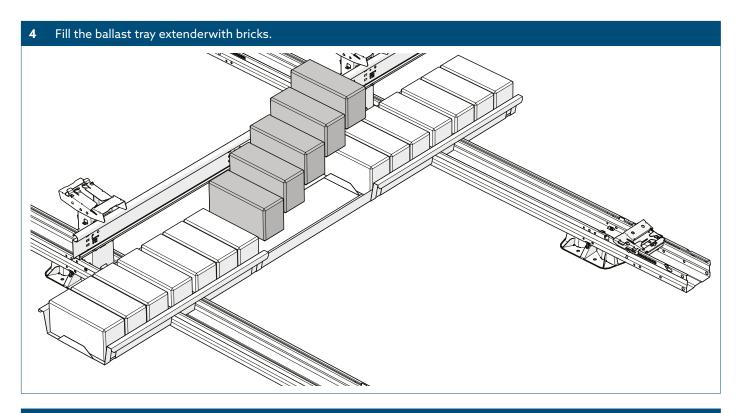


- If the project plan specifies more than one ballast tray, slide the outer ballast tray against the tabs in the unit. In this array you can place a maximum of three ballast trays in a row.
- Place the bricks in the outer ballast tray on the flat side, otherwise they will not fit under the solar panel.
- follow the project plan for the required positions and quantities of ballast.

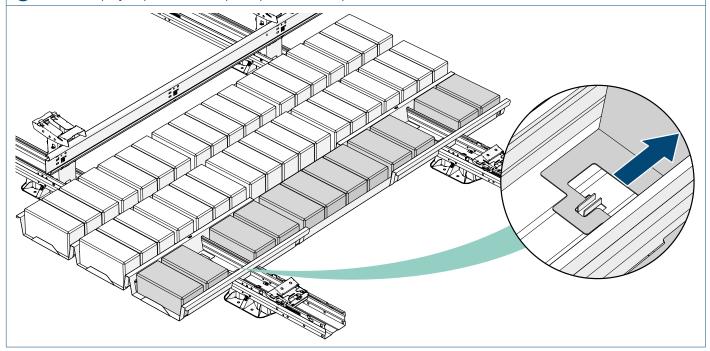

Position E In perimeter ballast brackets

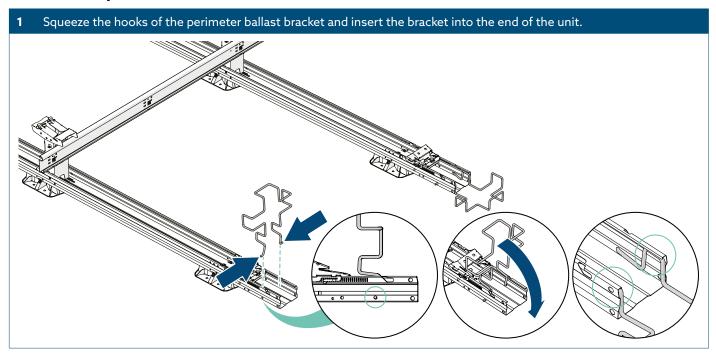

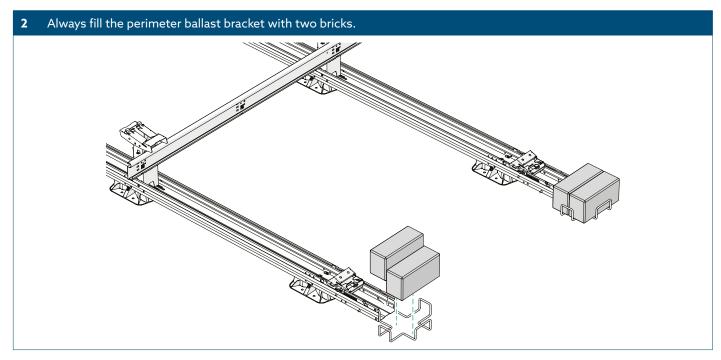


5. Lightning protection

If both a lightning protection system and a PV system are installed on a roof, several considerations need to be taken into account.

If a lightning protection system is installed or is present on a building, a separation distance (S) must be maintained between the metal parts and the cabling of the PV system, on the one hand, and the lightning protection system, on the other (requirement EN-IEC 62305 series). As a rule of thumb the following separation can be applied: 0.5 m. The correct distance can be calculated using the formulas in the EN-IEC 62305-3 series.

See Annex: Lightning protection for more information.

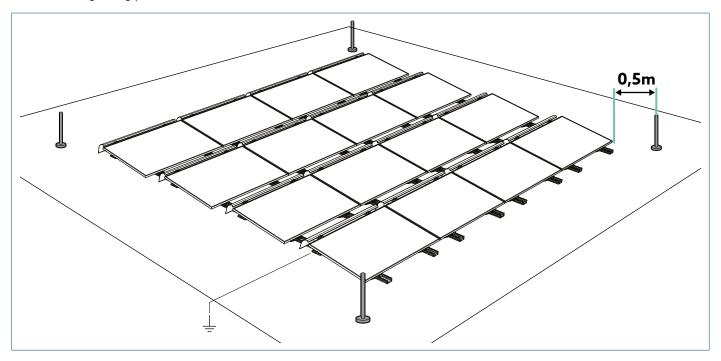

The lightning protection system is usually equipped with arrestors, which ensure that lightning cannot strike the PV system.


Is it impossible to maintain the required separation distance or is it specified that the PV system must be integrated into the lightning system? Then combine the PV system with the lightning protection system in accordance with EN-IEC 62305. Aid: use the decision tree on page. 28 and annex Lightning protection from page 31.


The CPX Wave mounting system has been tested and approved for use in accordance with EN-IEC 62305. The lightning current carrying capacity has been tested according to EN 62561-1 and complies with test class N (50kA, 25 As, 0.63MA²s). Annex C of this manual indicates what and how such an installation can be created.

1 Consult your lightning protection specialist beforehand to analyse your project and to avoid unwanted safety issues. CPX is in no way responsible for the installation and/or connection of the lightning protection on the roof. Get expert advice from your specialist and ensure that a safe installation can be guaranteed according to EN-IEC 62305 and HD-IEC 60364.

6. Mounting the first solar panel

A Do not mount any solar panels if there may be strong winds in the time between mounting the solar panel and wind deflectors. Immediately mount the wind deflectors after mounting a field of solar panels.

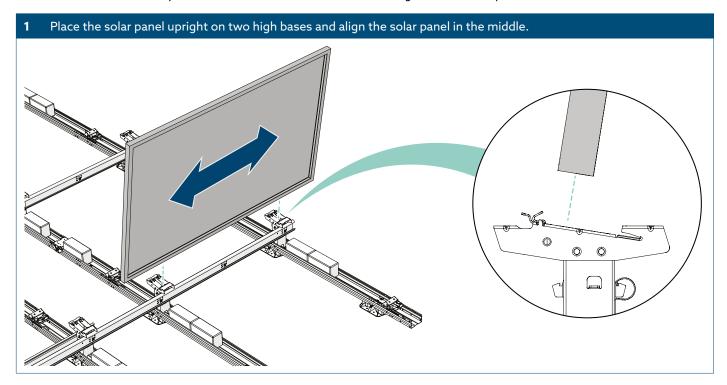


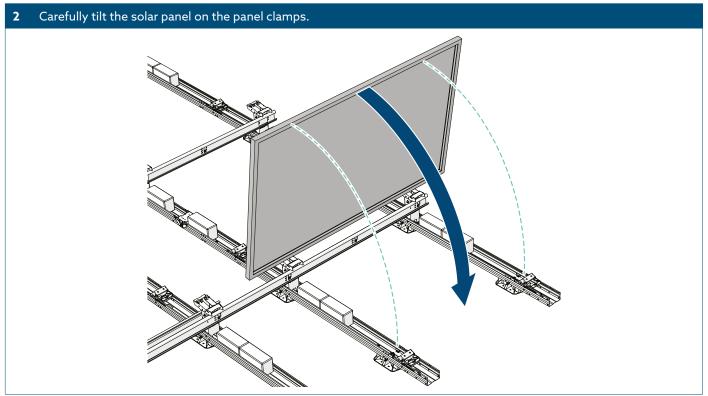


Pull the solar panel towards you so that the solar panel frame hooks into the high bases.




1 The solar panel should now rest on the lower section of the panel clamp. If the solar panel frame rests on the top part of the panel clamp, push the panel clamp backwards using the unlock tool. See Appendix for more information.

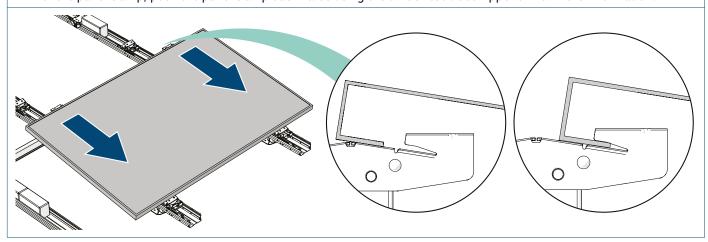



- Pull the panel clamp towards you until they can go no further, so the panel clamps hook into the frame of the solar
- 5 Pull the locking mechanism up through the clamp handle until it clicks into place to lock the solar panel in place.

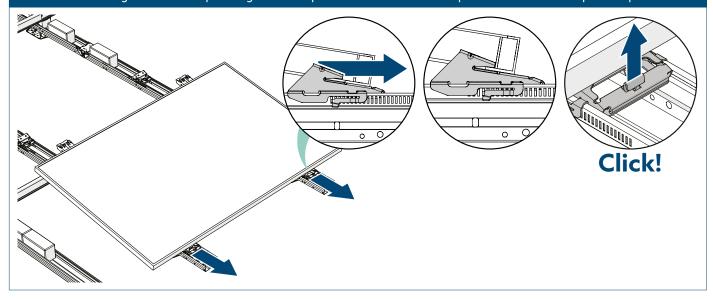


7. Mounting the following solar panels

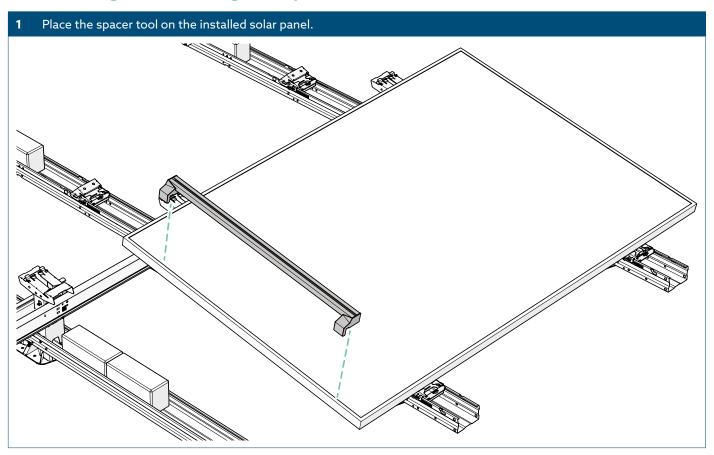

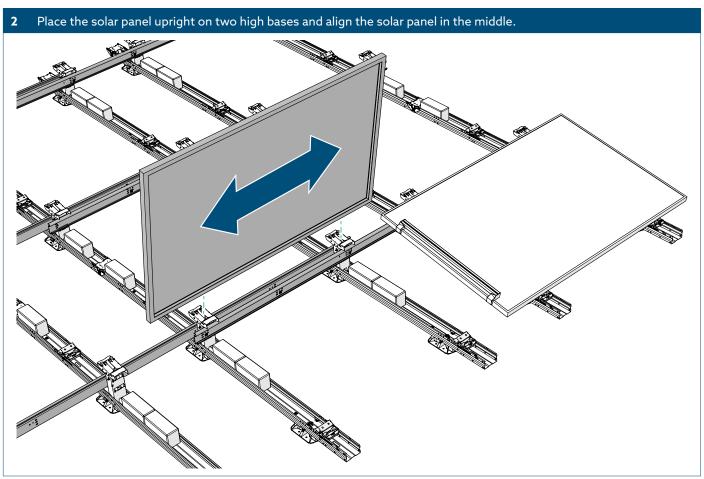


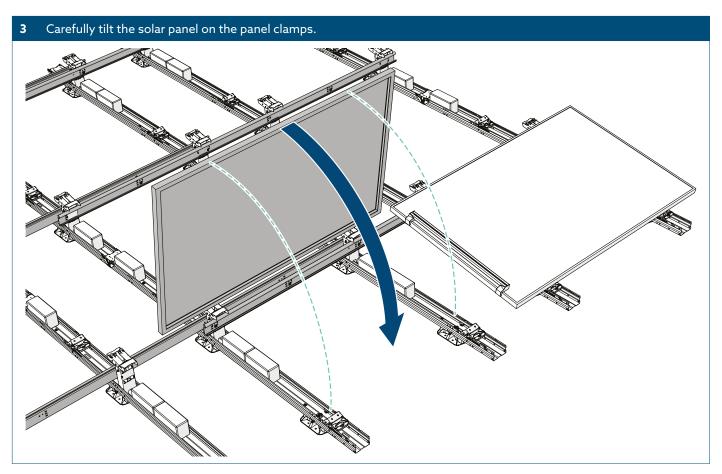


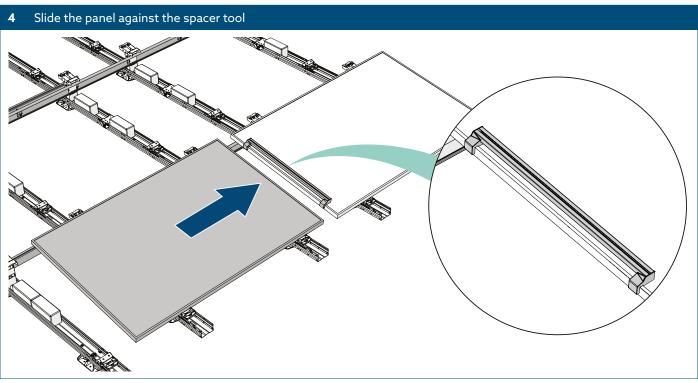


Repeat step 6.3. Pull the solar panel towards you so that the solar panel frame hooks into the high bases.
Repeat step 6.4. Pull the panel clamp towards you until they can go no further, so the panel clamps hook into the frame of the solar panel.
Repeat step 6.5. Pull the locking mechanism up through the clamp handle until it clicks into place to lock the solar panel in place.
Repeat the steps in this chapter for all panels.


8. Placing Rear Deflectors

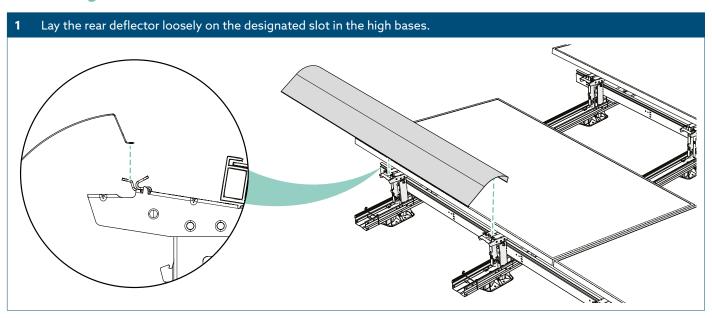


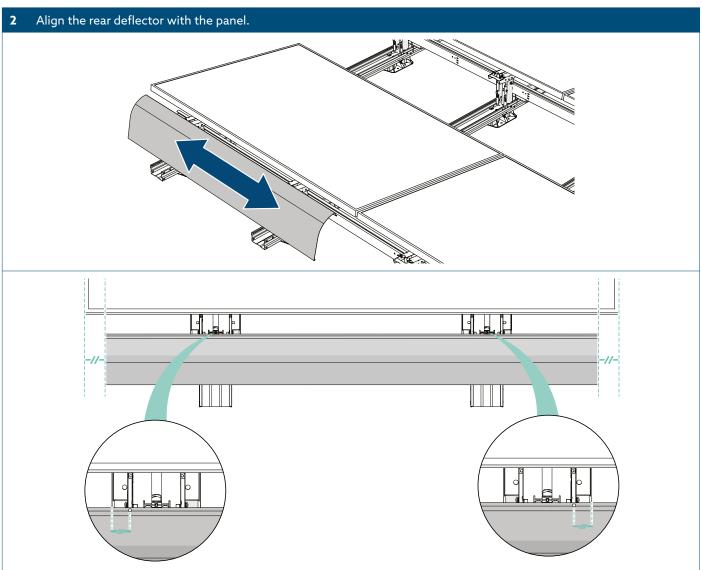



1 Use the holes in the top of the rear deflector to centre it properly.

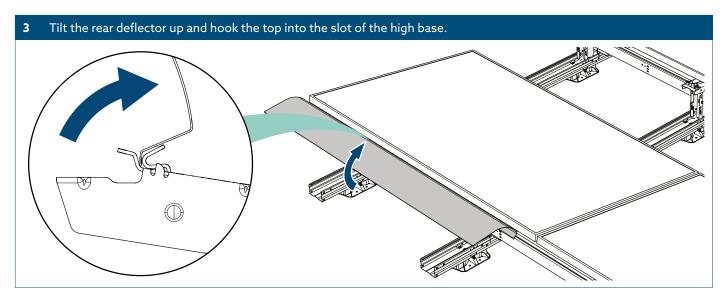

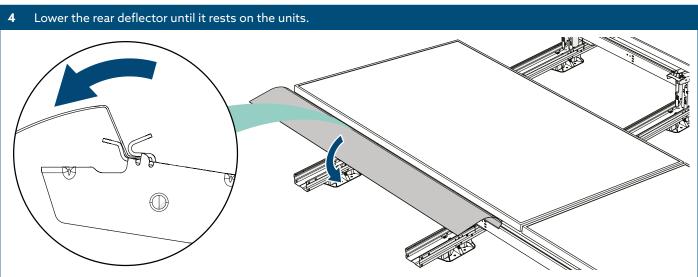


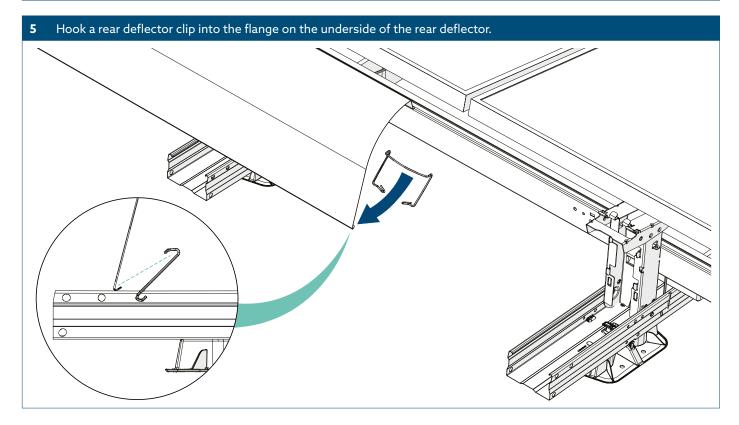

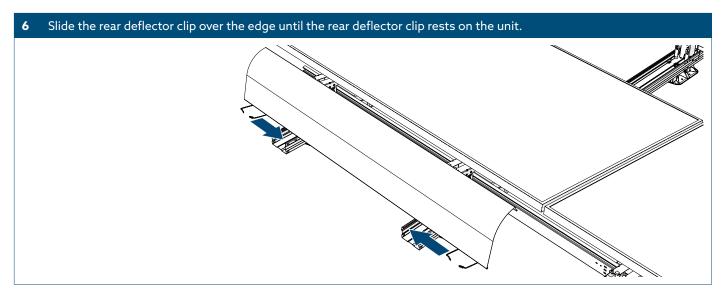

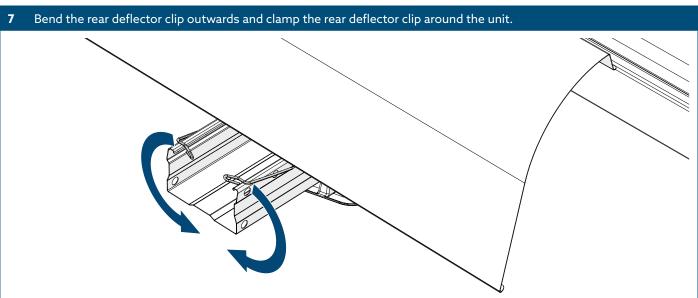

Repeat the steps in this chapter for all wind deflectors.

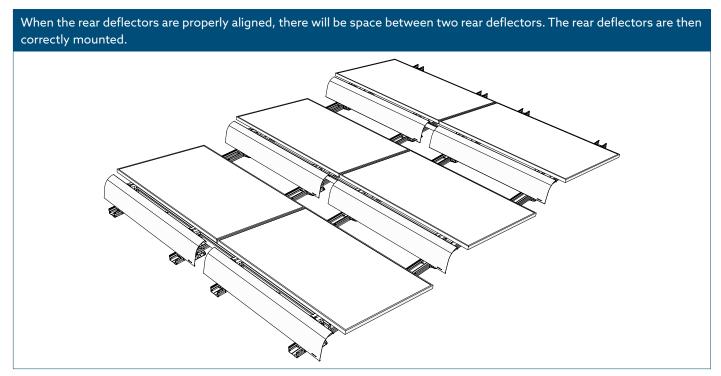

Annexes

A. Cable management

Cable bracket positioning table

	Spacing ≤350 mm	Spacing >350 mm
	≤ 350	> 350
Number of cable brackets	1	2
Positioning of the cable bracket	in the middle between the two stabilizers	2× 10 cm next to the two stabilizers
Fixing of the cable	Cable ties	Cable ties


	End of a row without stabilizer	End of a row with stabilizer
Number of cable brackets	3	0
Positioning of the cable bracket	1× 10 cm next to the end of the stabilizer 2× 5 cm next to the high base	Do not lay the cable over the end of the stabilizers: sharp edges can damage the cable.
Fixing of the cable	Cable ties	Cable ties

B. Grounding, equipotential bonding and lightning protection

Method for grounding/equipotential bonding

Thanks to the integrated part bonding, no additional equipotential bonding between the metal parts is required:

- Fully tightening the panel clamping ensures the correct contact of the panel frame with the high base
- 2) The cutting edge at the top of the uprights cut into the frame edge of the solar panels.
- 3) The cutting edge at the bottom of the high base elements cuts into the module frame of the solar panel.

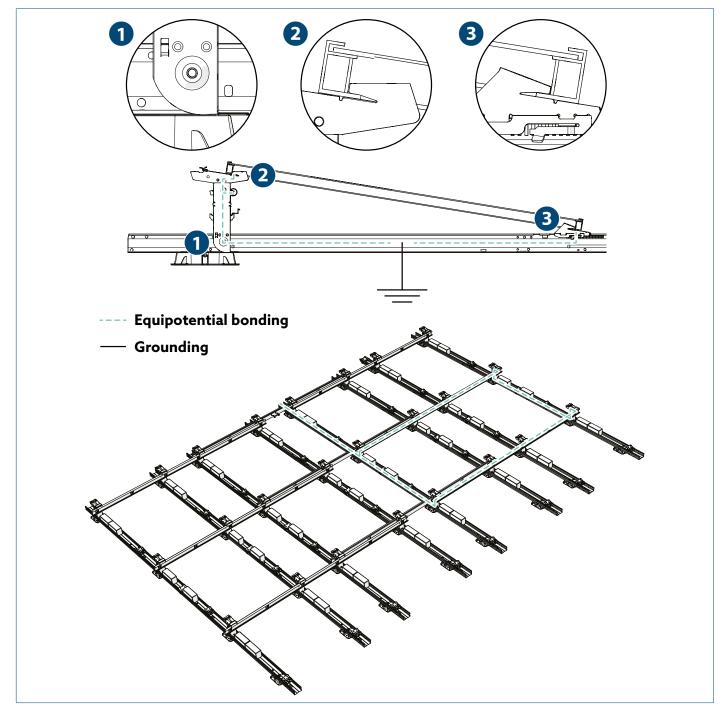

Installation of equipotential bonding conductor


- The earthing conductor (≥Ø 4mm²) runs parallel to the plus and min. conductors and is connected to a separate earthing point of the inverter.
- · Each individual PV field will have its own bonding conductor.
- At least one unit in a field must be connected to an earth rail.
- The earthing cable can be fitted with a cable eye and screwed to the rail together with serrated spring washers.
- · Correct installation: protected against corrosion and firmly assembled.

Lightning protection

Preferred method: Installation of lightning detection system with conductor spikes

Determine the safe separation distance (S in graphic below) according to NEN-EN-IEC 62305 (minimum 0.5 metres). Maintain this separation distance as a minimum between the solar panels field and lightning protection system (LPS).

in this way you keep the solar panel field separate from the existing LPS and prevent lightning current from being conducted into the field.

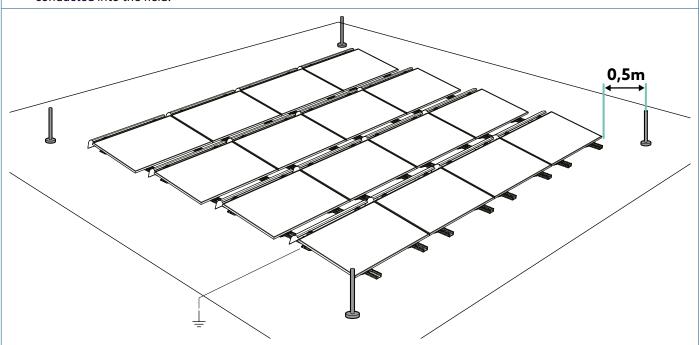

Alternative method: connecting the PV system to the LPS

If it is not possible to install the lightning protection, connect the PV system to the existing LPS of the building according to the applicable lightning protection level (LPL). The lightning protection level of the building is determined on the basis of the risk analysis in accordance with standard EN-IEC 62305-2. Please refer to the table below.


Mesh size	LPL level	Connect the PV system every
5 × 5 metre	1	5 metre
10 × 10 metre	Ш	10 metre
15 × 15 metre	Ш	15 metre
20 × 20 metre	IV	20 metre


A few points to note:

- Make sure that cable supports, ducts, etc. are grounded and connected to the lightning protection system.
- Metal cable brackets also form part of the PV system.
- Use a round wire with a minimum cross section of Ø8mm (= 50mm²) for the incoming and outgoing line to the lightning protection system.
- Check whether an additional type 1 or type 2 surge protector is required for the cable lines (according to standard EN-IEC 62304).
- Preferably lay the cabling of the PV system in separate metal earthed conduits over the entire route, from roof entry, via inverter to the main distributor. The conduit should preferably be grounded to the roof safety net of the lightning protection system, to the grounding point at the inverter and to the earth rail at the main distribution system.
- A earth wire must run along the cabling of the PV system, coupled to the roof protection grid of the lightning protection installation, coupled to the ground point at the inverter and coupled to the main earth rail of the main distribution
- Each individual PV installation must have an inlet and outlet to the lightning protection system at each corner of the field.

- To connect to the roof catch pipes, use a round aluminium or copper conductor (solid wire) with a minimum cross section of Ø8 mm (= 50 mm²).
- To reduce the contact resistance, each rail connector must be bridged. Use mounting tape as described below (tested and approved solution).
- CPX is in no way responsible for the installation and/or connection of lightning protection on the roof. Get expert advice from your specialist and ensure that a safe installation can be guaranteed according to EN-IEC 62305 and HD-IEC 60364.

Preparation

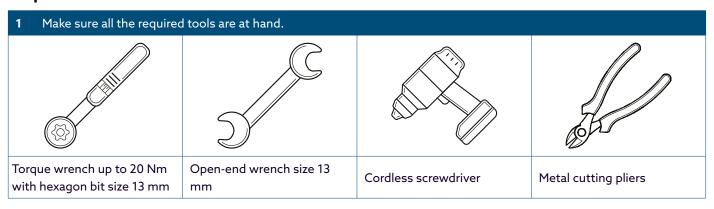


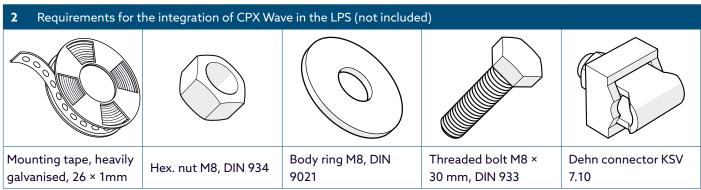


1 Get expert advice from your lightning protection specialist.


These items must be designed for use in a C4 environment and must be compatible with the CPX Wave items with Magnelis coating.

Installation

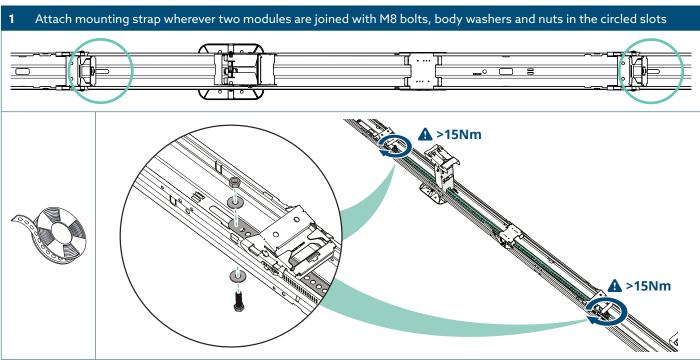


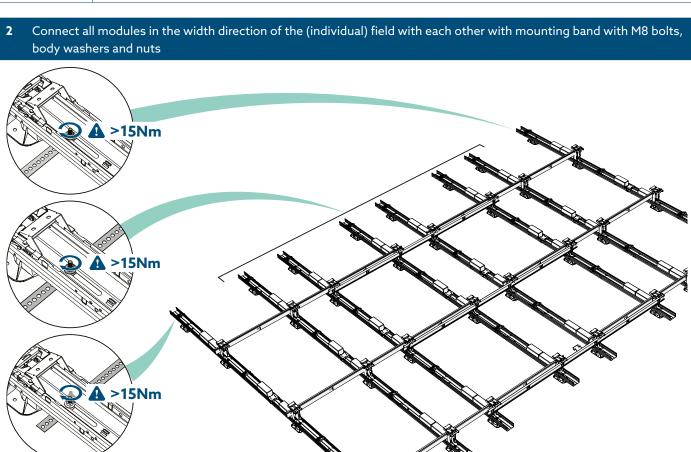

3 Drill ø10mm holes in the modules at all corners of the field for the connection to the roof trap and mount the four KSV 7.10 connectors

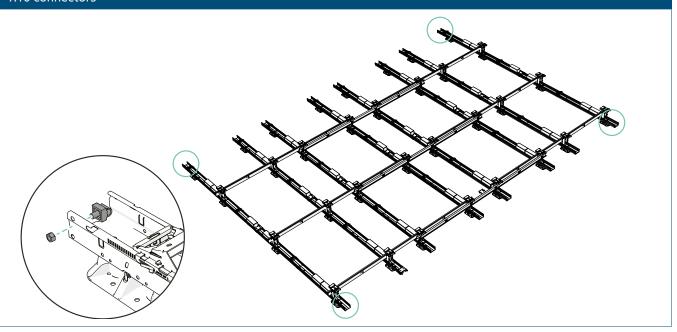

4 Attach an aluminium or copper conductor with a diameter of at least ø8mm to the four KSV 7.10 connectors. Attach the four conductor wires to the roof trap

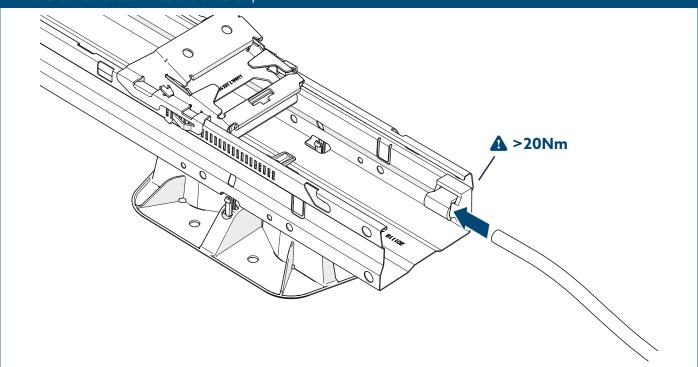


- The connection of the PV system to the roof arresting lines of the lightning system can now be established. To do this, attach a round aluminium or copper conductor (solid wire) with a minimum cross section of Ø8mm (= 50mm²) for the incoming and outgoing line on the one side to the four KSV 7.10 connectors and on the other side to the roof catch pipes.
- 1 The CPX Wave mounting system has been tested and approved for use in accordance with EN-IEC 62305. The lightning current carrying capacity has been tested according to EN 62561-1 and complies with test class N (50kA, 25 As, 0.63MA²s).

Removal and recycling

General

Always follow local laws and regulations when dismantling the mounting system and disposing of it.

Removing coupler

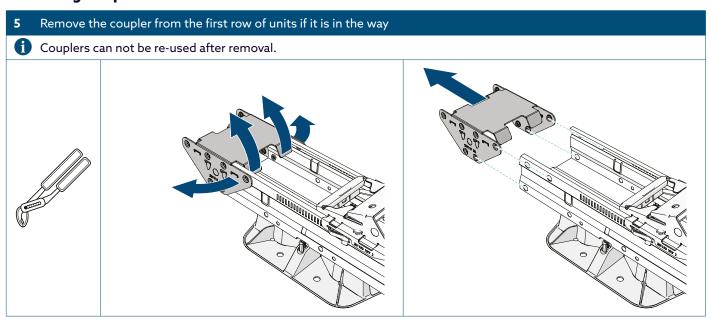

Removing a solar panel

- Unlock the panel clamp using a small flathead screwdriver.
- 2 Slide the panel clamp back using the module unlock tool.

